


GASKET THERMOCOUPLE



EXAMPLE ORDERING CODE:

GS TC - 125 - KS - G - 304 - 3 - 12 - 24 - G - SP

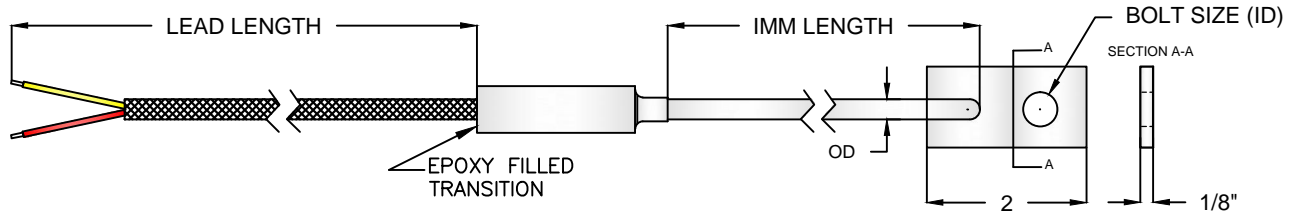

TYPE

PROBE DIAMETER	
125	.125" OD
187	.187" OD
250	.250" OD
312	.312" OD

TERMINATION	
BE	BARE ENDS
SP	STANDARD PLUG
SJ	STANDARD JACK
MP	MINI PLUG
MJ	MINI JACK
CP	CERAMIC PLUG
CJ	CERAMIC JACK
HP	HI TEMP PLUG
HJ	HI TEMP JACK
DP	DUAL PLUG
DJ	DUAL JACK

CALIBRATION (ADD S FOR SPECIAL LIMITS)	
J	IRON/CONSTANTAN
K	CHROMAL/ALUMEL
T	COPPER/CONSTANTAN
E	CHROMEL/CONSTANTAN
JJ	DUAL IRON/CONSTANTAN
KK	DUAL CHROMAL/ALUMEL
TT	DUAL COPPER/CONSTANTAN
EE	DUAL CHROMEL/CONSTANTAN

LEAD TYPE	
G	GLASS
T	TEFLON
SB	STAINLESS BRAID
AC	ARMOR CABLE

MEASURING JUNCTION	
G	GROUNDING
U	UNGROUNDING

LEAD LENGTH

IMM LENGTH

SHEATH
304
316
310
A600

CODE	BOLT SIZE	ID
1	#6	.144"
2	#8	3/16"
3	#10	13/64"
4	#12	7/32"
5	1/4"	9/32"
6	5/16"	11/32"
7	3/8"	13/32"

IMMERSION CAN HAVE 90 DEG BEND
 SPECIAL DESIGNS OR MATERIALS UPON REQUEST
 MEETS ANSI AND ASTM STANDARDS FOR THERMOCOUPLE CALIBRATION TOLERANCES