



PLASTIC MELT THERMOCOUPLE

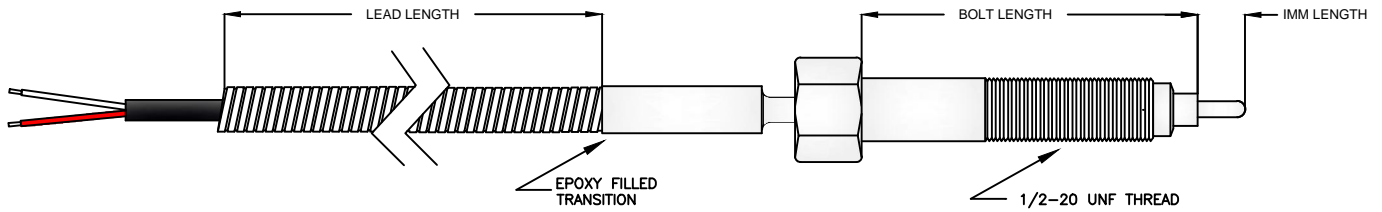

TCPM - 125 - J - G - 304 - 3 - .5 - 24 - AC - BE



TYPE
TCPM

PROBE DIAMETER
125 | .125" OD

CALIBRATION (ADD S FOR SPECIAL LIMITS)	
J	IRON/CONSTANTAN
K	CHROMAL/ALUMEL
T	COPPER/CONSTANTAN
E	CHROMEL/CONSTANTAN
JJ	DUAL IRON/CONSTANTAN
KK	DUAL CHROMAL/ALUMEL
TT	DUAL COPPER/CONSTANTAN
EE	DUAL CHROMEL/CONSTANTAN

MEASURING JUNCTION
G | GROUNDED
U | UNGROUNDED

SHEATH	
310	310 STAINLESS
304	304 STAINLESS
316	316 STAINLESS
600	INCONEL 600

IMM LENGTH

MELT BOLT LENGTH	
3	3" BOLT
6	6" BOLT
9	9" BOLT
12	12" BOLT

TERMINATION	
BE	BARE ENDS
SP	STANDARD PLUG
SJ	STANDARD JACK
MP	MINI PLUG
MJ	MINI JACK
CP	CERAMIC PLUG
CJ	CERAMIC JACK
HP	HI TEMP PLUG
HJ	HI TEMP JACK
DP	DUAL PLUG
DJ	DUAL JACK

LEAD TYPE	
G	GLASS
T	TEFLON
SB	STAINLESS BRAID
AC	ARMOR CABLE

LEAD LENGTH

DESIGNS FOR THE RIGHT APPLICATION

SPECIAL DESIGNS OR MATERIALS UPON REQUEST

MEETS ANSI AND ASTM STANDARDS FOR THERMOCOUPLE CALIBRATION TOLERANCES