


TUBE SKIN THERMOCOUPLE

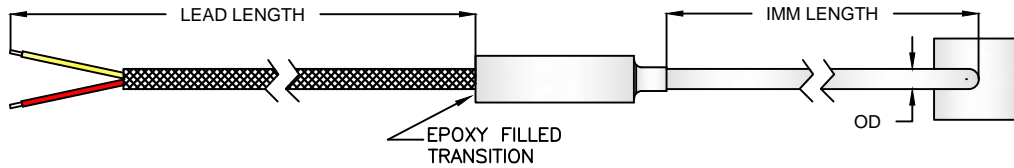

EXAMPLE ORDERING CODE:

TS TC - 125 - KS - G - 304 - 1 - L3 - 12 - 24 - G - SP

↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑																								
TYPE																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">PROBE DIAMETER</th> </tr> </thead> <tbody> <tr> <td>125</td> <td>.125" OD</td> </tr> <tr> <td>187</td> <td>.187" OD</td> </tr> <tr> <td>250</td> <td>.250" OD</td> </tr> <tr> <td>312</td> <td>.312" OD</td> </tr> </tbody> </table>		PROBE DIAMETER		125	.125" OD	187	.187" OD	250	.250" OD	312	.312" OD																							
PROBE DIAMETER																																		
125	.125" OD																																	
187	.187" OD																																	
250	.250" OD																																	
312	.312" OD																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">CALIBRATION (ADD S FOR SPECIAL LIMITS)</th> </tr> </thead> <tbody> <tr> <td>J</td> <td>IRON/CONSTANTAN</td> </tr> <tr> <td>K</td> <td>CHROMAL/ALUMEL</td> </tr> <tr> <td>T</td> <td>COPPER/CONSTANTAN</td> </tr> <tr> <td>E</td> <td>CHROMEL/CONSTANTAN</td> </tr> <tr> <td>JJ</td> <td>DUAL IRON/CONSTANTAN</td> </tr> <tr> <td>KK</td> <td>DUAL CHROMAL/ALUMEL</td> </tr> <tr> <td>TT</td> <td>DUAL COPPER/CONSTANTAN</td> </tr> <tr> <td>EE</td> <td>DUAL CHROMEL/CONSTANTAN</td> </tr> </tbody> </table>		CALIBRATION (ADD S FOR SPECIAL LIMITS)		J	IRON/CONSTANTAN	K	CHROMAL/ALUMEL	T	COPPER/CONSTANTAN	E	CHROMEL/CONSTANTAN	JJ	DUAL IRON/CONSTANTAN	KK	DUAL CHROMAL/ALUMEL	TT	DUAL COPPER/CONSTANTAN	EE	DUAL CHROMEL/CONSTANTAN															
CALIBRATION (ADD S FOR SPECIAL LIMITS)																																		
J	IRON/CONSTANTAN																																	
K	CHROMAL/ALUMEL																																	
T	COPPER/CONSTANTAN																																	
E	CHROMEL/CONSTANTAN																																	
JJ	DUAL IRON/CONSTANTAN																																	
KK	DUAL CHROMAL/ALUMEL																																	
TT	DUAL COPPER/CONSTANTAN																																	
EE	DUAL CHROMEL/CONSTANTAN																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">MEASURING JUNCTION</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>GROUNDED</td> </tr> <tr> <td>U</td> <td>UNGROUNDED</td> </tr> </tbody> </table>		MEASURING JUNCTION		G	GROUNDED	U	UNGROUNDED																											
MEASURING JUNCTION																																		
G	GROUNDED																																	
U	UNGROUNDED																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">SHEATH</th> </tr> </thead> <tbody> <tr> <td>304</td> <td></td> </tr> <tr> <td>316</td> <td></td> </tr> <tr> <td>310</td> <td></td> </tr> <tr> <td>A600</td> <td></td> </tr> </tbody> </table>		SHEATH		304		316		310		A600																								
SHEATH																																		
304																																		
316																																		
310																																		
A600																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>CODE</th> <th>WELD PAD SIZE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1" X 1" X 1/8"</td> </tr> <tr> <td>2</td> <td>1" X 1" X 1/16"</td> </tr> </tbody> </table>		CODE	WELD PAD SIZE	1	1" X 1" X 1/8"	2	1" X 1" X 1/16"																											
CODE	WELD PAD SIZE																																	
1	1" X 1" X 1/8"																																	
2	1" X 1" X 1/16"																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">TERMINATION</th> </tr> </thead> <tbody> <tr> <td>BE</td> <td>BARE ENDS</td> </tr> <tr> <td>SP</td> <td>STANDARD PLUG</td> </tr> <tr> <td>SJ</td> <td>STANDARD JACK</td> </tr> <tr> <td>MP</td> <td>MINI PLUG</td> </tr> <tr> <td>MJ</td> <td>MINI JACK</td> </tr> <tr> <td>CP</td> <td>CERAMIC PLUG</td> </tr> <tr> <td>CJ</td> <td>CERAMIC JACK</td> </tr> <tr> <td>HP</td> <td>HI TEMP PLUG</td> </tr> <tr> <td>HJ</td> <td>HI TEMP JACK</td> </tr> <tr> <td>DP</td> <td>DUAL PLUG</td> </tr> <tr> <td>DJ</td> <td>DUAL JACK</td> </tr> </tbody> </table>		TERMINATION		BE	BARE ENDS	SP	STANDARD PLUG	SJ	STANDARD JACK	MP	MINI PLUG	MJ	MINI JACK	CP	CERAMIC PLUG	CJ	CERAMIC JACK	HP	HI TEMP PLUG	HJ	HI TEMP JACK	DP	DUAL PLUG	DJ	DUAL JACK									
TERMINATION																																		
BE	BARE ENDS																																	
SP	STANDARD PLUG																																	
SJ	STANDARD JACK																																	
MP	MINI PLUG																																	
MJ	MINI JACK																																	
CP	CERAMIC PLUG																																	
CJ	CERAMIC JACK																																	
HP	HI TEMP PLUG																																	
HJ	HI TEMP JACK																																	
DP	DUAL PLUG																																	
DJ	DUAL JACK																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">LEAD TYPE</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>GLASS</td> </tr> <tr> <td>T</td> <td>TEFLON</td> </tr> <tr> <td>SB</td> <td>STAINLESS BRAID</td> </tr> <tr> <td>AC</td> <td>ARMOR CABLE</td> </tr> </tbody> </table>		LEAD TYPE		G	GLASS	T	TEFLON	SB	STAINLESS BRAID	AC	ARMOR CABLE																							
LEAD TYPE																																		
G	GLASS																																	
T	TEFLON																																	
SB	STAINLESS BRAID																																	
AC	ARMOR CABLE																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">LEAD LENGTH</th> </tr> </thead> <tbody> <tr> <td>L3</td> <td>12</td> </tr> </tbody> </table>		LEAD LENGTH		L3	12																													
LEAD LENGTH																																		
L3	12																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">IMM LENGTH</th> </tr> </thead> <tbody> <tr> <td>L3</td> <td>24</td> </tr> </tbody> </table>		IMM LENGTH		L3	24																													
IMM LENGTH																																		
L3	24																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>CODE</th> <th>MOUNT</th> <th>PIPE OD</th> </tr> </thead> <tbody> <tr> <td>F</td> <td>FLAT</td> <td>ENTER IN INCHES</td> </tr> <tr> <td>L</td> <td>LONGITUDINAL</td> <td></td> </tr> <tr> <td>R</td> <td>RIGHT ANGLE</td> <td></td> </tr> </tbody> </table>		CODE	MOUNT	PIPE OD	F	FLAT	ENTER IN INCHES	L	LONGITUDINAL		R	RIGHT ANGLE																						
CODE	MOUNT	PIPE OD																																
F	FLAT	ENTER IN INCHES																																
L	LONGITUDINAL																																	
R	RIGHT ANGLE																																	

IMMERSION CAN BE BENT FOR EXPANSION

SPECIAL DESIGNS OR MATERIALS UPON REQUEST

MEETS ANSI AND ASTM STANDARDS FOR THERMOCOUPLE CALIBRATION TOLERANCES