

FIELD CUTTABLE RTD

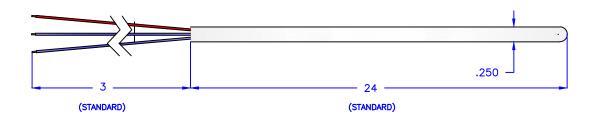

EXAMPLE ORDERING CODE:

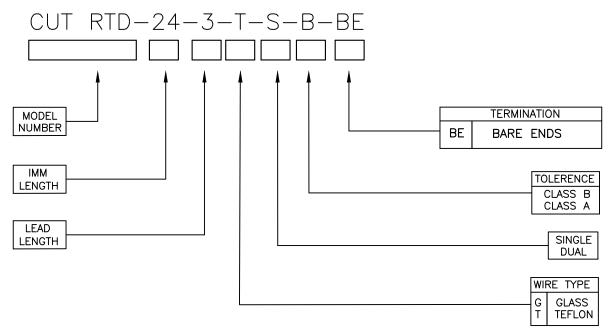

THE CUTTABLE RTD SENSOR IS USED WHEN YOU PREFER TO BUY SINGLE LENGTH RTD SENSORS FOR MULTIPLE LENGTH APPLICATIONS. IDEAL FOR USE IN THE FIELD WHERE THE EXACT LENGTH MAY NOT BE KNOWN. THEY ARE CUT WITH A TUBE CUTTER BY THE END USER ONCE THE REQUIRED LENGTH IS DETERMINED. IT CAN BE USED WITH MULTIPLE ACCESSORIES TO MEET YOUR APPLICATION NEEDS.

24" STANDARD IMMERSION LENGTH WITH STANDARD 3" LEAD LENGTH. CUSTOM LENGTHS ARE AVAILABLE UPON REQUEST.

PLATINUM RTD ELEMENT: .00385 TRC, 100 OHM @ 0 DEG C SPECIAL RTD ELEMENTS AVAILABLE UPON REQUEST.

TEMPERATURE RANGE: -50F TO 500F

2 WIRE AND 4 WIRE RTD'S ARE AVAILABLE UPON REQUEST.

OTHER TERMINATIONS ARE AVAILABLE.