


INDUSTRIAL THERMOCOUPLE - THREADED WELL



EXAMPLE ORDERING CODE:

IND TC - AX - 3/4 - 250 - 304 - K - G - NUN6 - 02 - 316 - 1.75 - 4.5

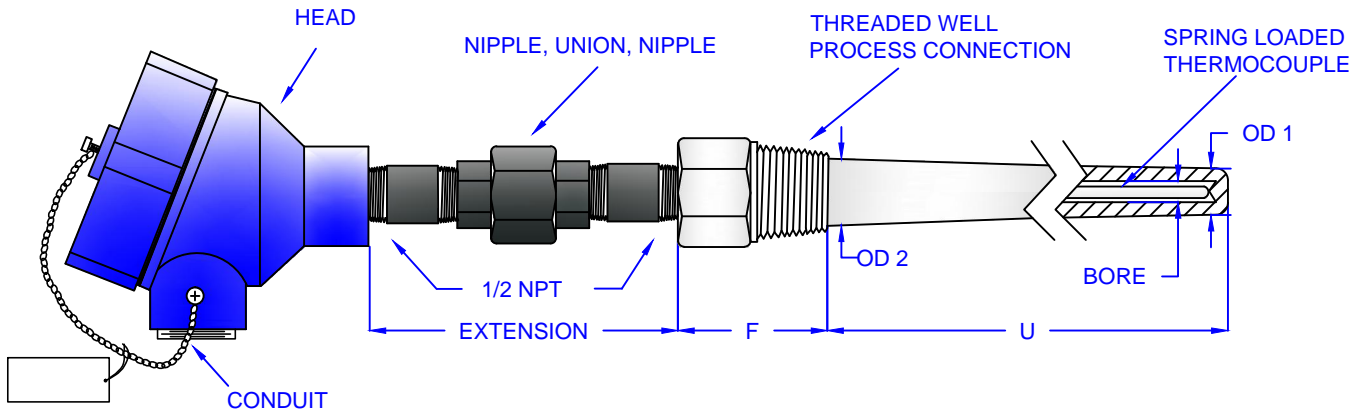

MODEL NUMBER

HEAD	
AL	STANDARD ALUMINUM
AX	ALUMINUM EXPLOSION PROOF
CI	CAST IRON
SS	STAINLESS STEEL

CONDUIT THREAD	
1/2	1/2" NPT
3/4	3/4" NPT

PROBE DIAMETER	
125	.125" OD
187	.187" OD
250	.250" OD
312	.312" OD
375	.375" OD

PROBE SHEATH	
304	304 STAINLESS
316	316 STAINLESS
310	310 STAINLESS
600	INCONEL 600

CALIBRATION (ADD S FOR SPECIAL LIMITS)	
J	IRON/CONSTANTAN
K	CHROMAL/ALUMEL
T	COPPER/CONSTANTAN
E	CHROMEL/CONSTANTAN
JJ	DUAL IRON/CONSTANTAN
KK	DUAL CHROMAL/ALUMEL
TT	DUAL COPPER/CONSTANTAN
EE	DUAL CHROMEL/CONSTANTAN

U LENGTH

F LENGTH
(1.75" STD)

WELL MATERIAL	
CS	CARBON STEEL
304	304 STAINLESS
316	316 STAINLESS
600	INCONEL 600

THERMOWELL TYPE	
01	1/2" SCREWED TAPERED .63 TO .50 WITH .260 BORE
02	3/4" SCREWED TAPERED .88 TO .75 WITH .260 BORE
03	3/4" SCREWED TAPERED .88 TO .75 WITH .385 BORE
04	1" SCREWED TAPERED 1.10 TO .75 WITH .260 BORE
05	1" SCREWED TAPERED 1.10 TO .75 WITH .385 BORE
06	1/2" SCREWED STRAIGHT .63 OD WITH .260 BORE
07	3/4" SCREWED STRAIGHT .75 OD WITH .260 BORE
08	3/4" SCREWED STRAIGHT .75 OD WITH .385 BORE
09	1" SCREWED STRAIGHT .75 OD WITH .260 BORE
10	1" SCREWED STRAIGHT .75 OD WITH .385 BORE
11	3/4" SCREWED STEPPED WITH .260 BORE
12	1" SCREWED STEPPED WITH .260 BORE

EXTENSION - LENGTH		
N	NIPPLE	3"
NUN	NIPPLE, UNION, NIPPLE	6"

JUNCTION	
G	GROUNDED
U	UNGROUNDED