



TUBESKIN RTD

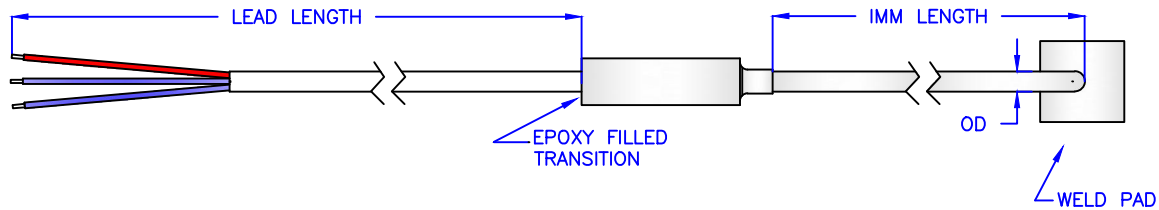

EXAMPLE ORDERING CODE:

TS RTD-250-LT-1-L3-12-24-T-S-B-BE



MODEL NUMBER

PROBE DIAMETER	
125	.125" OD
187	.187" OD
250	.250" OD
312	.312" OD

CONSTRUCTION	
LT	LOW TEMP
M	MID RANGE
MI	MI CABLE
HI	HI TEMP

CODE	WELD PAD SIZE
1	1" X 1" X 1/8"
2	1" X 1" X 1/16"

IMM LENGTH

LEAD LENGTH

TERMINATION

BE3	BARE ENDS
SP3	3 PIN STANDARD PLUG
SJ3	3 PIN STANDARD JACK
MP3	3 PIN MINI PLUG
MJ3	3 PIN MINI JACK
HP3	3 PIN HI TEMP PLUG
HJ3	3 PIN HI TEMP JACK

TOLERANCE	
CLASS B	
CLASS A	

SINGLE
DUAL

WIRE TYPE	
G	GLASS
T	TEFLON
AR	ARMOR

PLATINUM RTD ELEMENT: .00385 TRC, 100 OHM @ 0 DEG C
SPECIAL RTD ELEMENTS AVAILABLE UPON REQUEST

LT TEMPERATURE RANGE: -50F TO 500F
M TEMPERATURE RANGE: -50 TO 750F
MI TEMPERATURE RANGE: -290 TO 930F
HT TEMPERATURE RANGE: -290 TO 1,200F

2 WIRE AND 4 WIRE RTD'S ARE
AVAILABLE UPON REQUEST

CODE	MOUNT	PIPE OD
F	FLAT	ENTER IN INCHES
L	LONGITUDINAL	
R	RIGHT ANGLE	